


Electronic Soap Dispenser Parts Breakdown

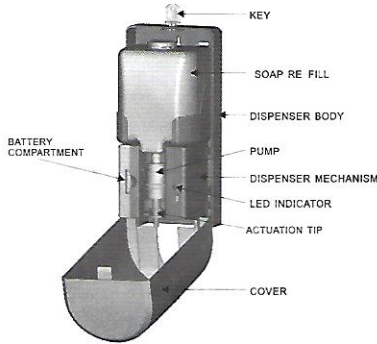

INSTALLATION METHOD

1. Insert the key into the hole located at the top of the dispenser, push down with the key and pull the cover towards you, the cover controls a power interlock switch located in the dispenser. In the closed position, the cover will actuate the power switch. The dispenser will not activate when the cover is in the open position.
2. Open the cover, Using the back plate as a template, mark screw hole locations on the wall, install supplied anchors in the wall, secure the dispenser with the supplied screws.
3. Remove the battery compartment by depressing the compartment tab pulling the compartment towards you. Insert six (6) AA size alkaline as diagramed in the battery compartment. Replace the battery compartment by sliding the compartment towards the back of the dispenser until it clicks into place.




FIGURE 1

USAGE:

1. Fill the soap into the replace or installate one soap bag with soap in the dispenser.
2. Close the cover and the LED will flash 3 times indicating the dispenser is ready for use, place hand(s) underneath dispenser within 5" of the sensor. the dispenser will dispense approximately 0.4ml of soap into your hand(s). if additional soap is needed, open the cover and put the toggle switch (figure 2) to 2 or 3 the dispenser will work 2 or 3 times. The LED will flash until the dispenser finishes.




FIGURE 2

1. POWERSWITCH
2. TOGGLE SWITCH
3. LED INDICATOR
4. SENSOR PARTS

Note: 1. The dispenser cover must be closed to activate.  
 2. When the supply voltage is too low, the LED will blink continuously, and then the dispenser won't work please change the batteries immediately.

Please pass the instruction to the user after finish install

